
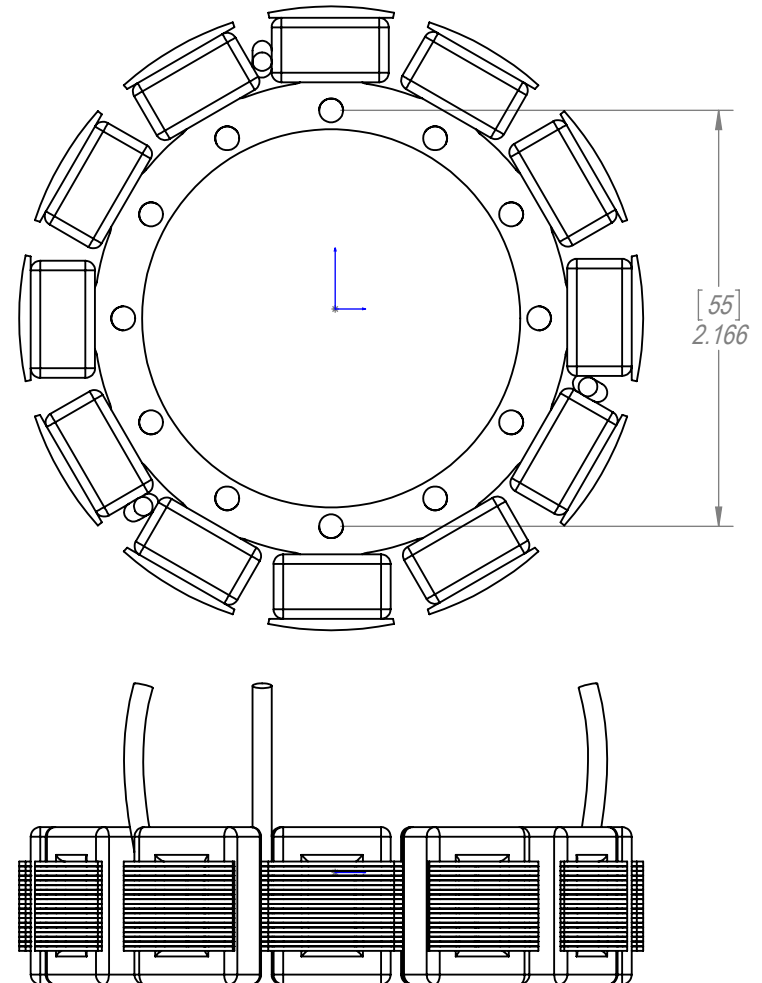


OLD: REV 1, Produced 2012 and earlier

New: REV 2, Produced 2013 and later

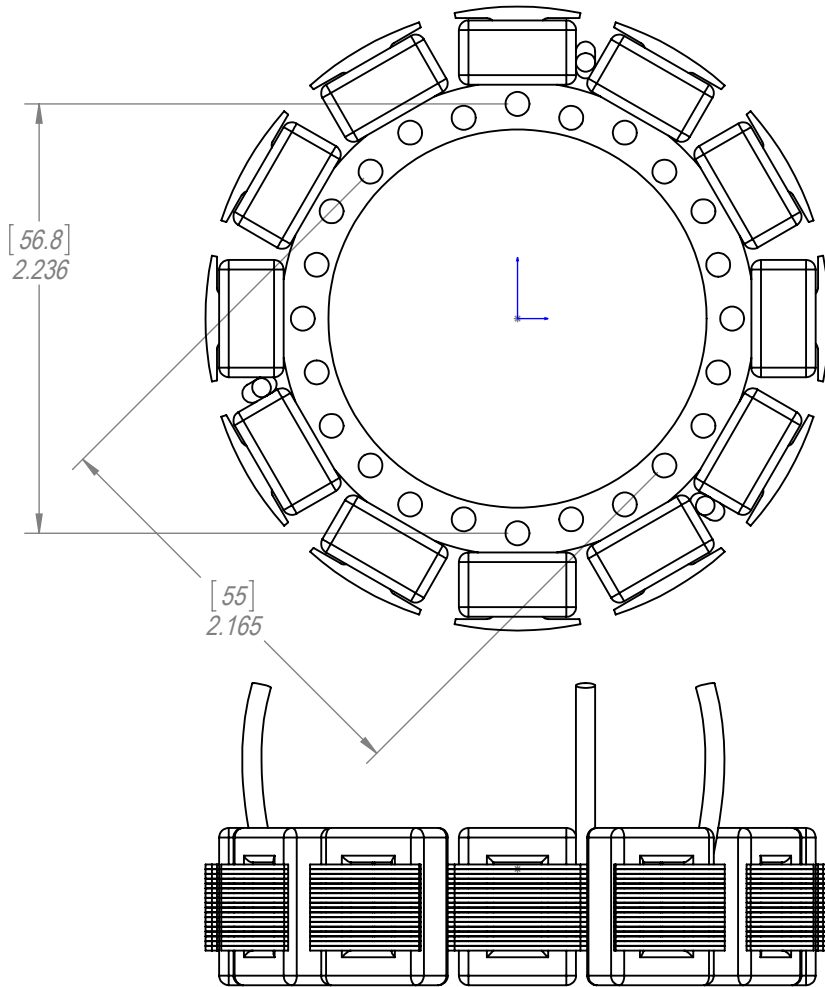

Differences from Rev. 1 and Rev. 2 stators:
-Outer 12 Holes eliminated.
-Inner 12 Holes rotated 15 degrees to align with Stator Poles.
-All other features are unchanged

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Sullivan UV TITLE: S676-400 Rev 1 vs Rev 2 Stator Assy			
DIMENSIONS ARE IN INCHES		DRAWN	KP			6/1/2013	
TOLERANCES:		CHECKED					
FRACTIONAL $\pm 1/64$		ENG APPR.					
ANGULAR: MACH \pm BEND \pm		MFG APPR.					
TWO PLACE DECIMAL $\pm .010$		Q.A.					
THREE PLACE DECIMAL $\pm .005$		PROPRIETARY AND CONFIDENTIAL					
INTERPRET GEOMETRIC TOLERANCING PER:		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE PERFECT PARTS COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THE PERFECT PARTS COMPANY IS PROHIBITED.			SIZE	DWG. NO.	REV
MATERIAL					A		1
FINISH					SCALE: 1:1	WEIGHT:	SHEET 1 OF 1
DO NOT SCALE DRAWING							