

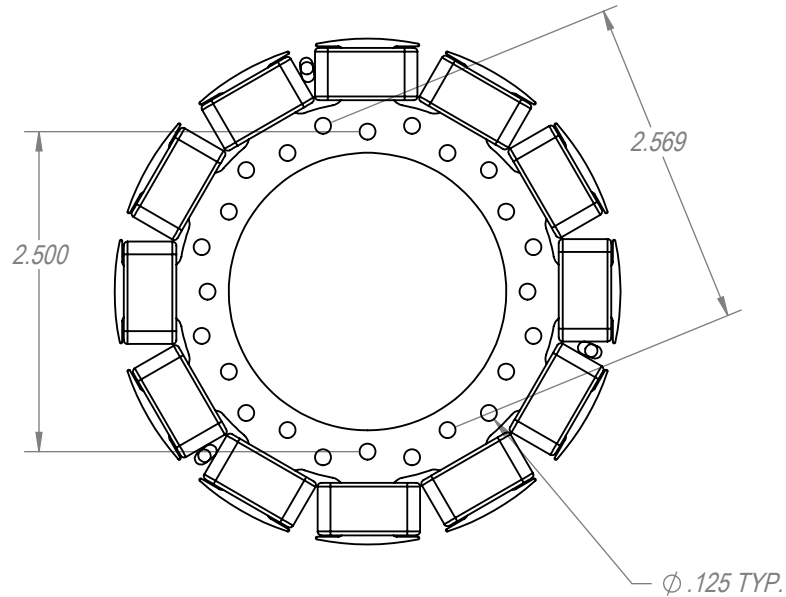
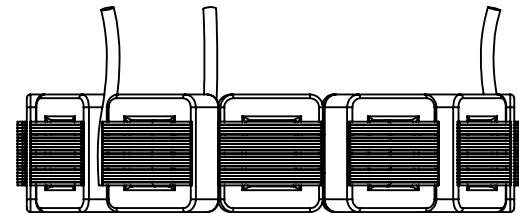


OLD: Rev 1, Produced 2012 and earlier

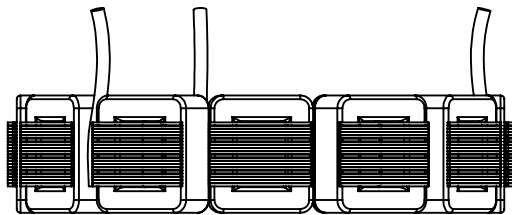

New: Rev 2, Produced 2013 and later

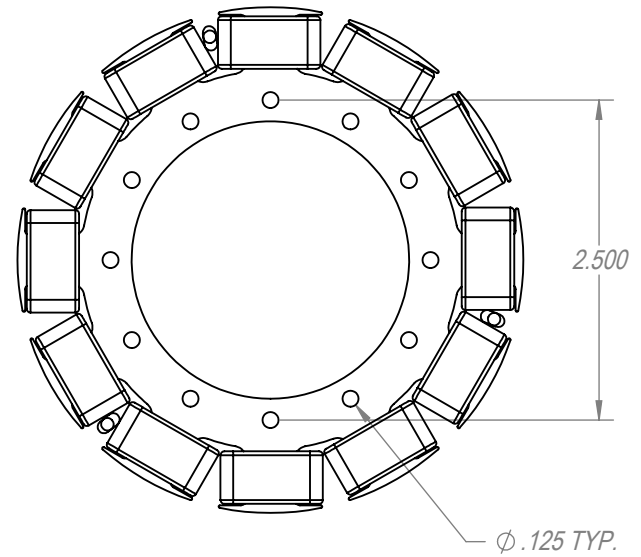

Differences from Rev. 1 and Rev. 2 Stators:
-Outer 12 Holes eliminated.
-Inner 12 holes rotated 15 degrees to align with Stator Poles.
-All other features are unchanged.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE	<i>Sullivan UV</i>		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/64$ ANGULAR: MACH \pm BEND \pm TWO PLACE DECIMAL $\pm .010$ THREE PLACE DECIMAL $\pm .005$	DRAWN KP	8/27/2013			TITLE: S676-500 Rev 1 vs Rev 2 Stator Assembly
INTERPRET GEOMETRIC TOLERANCING PER:	CHECKED		SIZE	DWG. NO.	
MATERIAL	ENG APPR.		A		1
FINISH	MFG APPR.			SCALE: 2:3	
DO NOT SCALE DRAWING	Q.A.		PROPRIETARY AND CONFIDENTIAL		
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE PERFECT PARTS COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THE PERFECT PARTS COMPANY IS PROHIBITED.				